

# Boronia Star

## Boronia Star Self Contained



### Features:

- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- 430 grade stainless steel interior & exterior except rear & under
- Black colorbond interior & exterior except rear & under
- 100% CFC free polyurethane foam for greater insulation properties and added strength
- Front breathing ventilation
- Forced air refrigeration system contained in a removable cassette for easy service and maintenance
- Optimised ducted air flow
- Auto defrost utilising waste heat recovery vapouriser
- Two adjustable plastic coated shelves per door
- Heavy duty swivel and brake castors
- On/off switch for internal lights (glass door only)
- Fitted with triple glazed self closing doors with high efficiency long life LED strip lighting
- Optional solid or double glazed heated doors
- Face mounted hinges (plinth mount ready)
- Hermetique compressor
- Anti corrosive evaporator coil coating


MODEL	HBS2U	HBS3U	HBS4U
Capacity	360 litres	560 litres	760 litres
<b>Finish: Stainless Steel interior and exterior*</b>			
H – Refrigerator +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>HBS2UGDSS</b> 130/3.8/560	<b>HBS3UGDSS</b> 150/4.6/690	<b>HBS4UGDSS</b> 170/5.5/850
<b>Finish: Black Colorbond® interior and exterior with stainless steel counter top and internal floor*</b>			
H – Refrigerator +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>HBS2UGDCB</b> 130/3.8/560	<b>HBS3UGDCB</b> 150/4.6/690	<b>HBS4UGDCB</b> 170/5.5/850

Solid door (SD) models same price as above


\*Refer notes page 35

Gas: Self-contained fridge R134a@-5C SST  
Electrical lead length 1.5m min. 240V 50Hz  
Heat rejection self-contained units: Fridge 1.4xWr


Options (see p. 35)

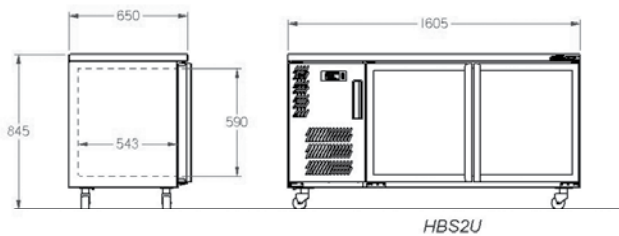

HBS2U

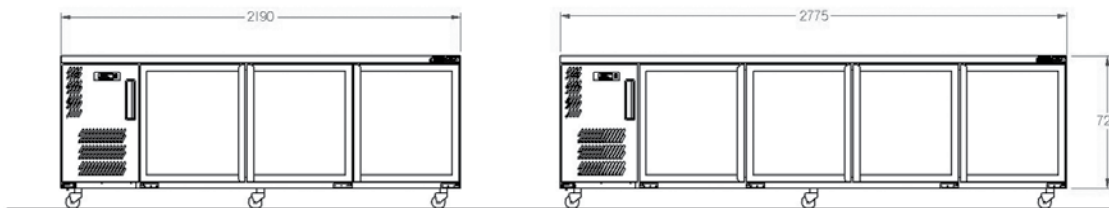

HBS3U

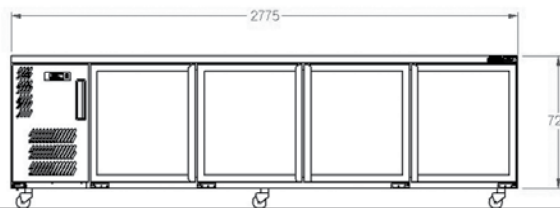

HBS4U

# Cameo Star

## Cameo Star Self Contained



### Features:

- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- 100% CFC free polyurethane foam for greater insulation properties and added strength
- Forced air refrigeration system contained in a removable cassette for easy servicing and maintenance
- Auto defrost
- Waste heat recovery vaporiser
- Two adjustable plastic coated shelves per door
- On/off switch for internal lights (glass door only)
- Coved internal floor
- On castors
- Fitted with double glazed self closing doors and high efficiency long life LED strip lighting
- Choice of doors:
  - Double glazed (standard)
  - Double glazed Argon E (optional)
  - Double glazed heated (optional)
- Front breathing ventilation
- Face mounted hinges (plinth mount ready)
- Anti corrosive evaporator coil coating


MODEL	HCS2U	HCS3U	HCS4U
Capacity	370 litres	575 litres	775 litres
<b>Finish: Stainless Steel interior and exterior*</b>			
Refrigerator +1°/+4° kg-unpacked / Amps-run / Wv-refrigeration Watts (nom.)	<b>HCS2UGDSS</b> 180/4.1/650	<b>HCS3UGDSS</b> 200/4.6/750	<b>HCS4UGDSS</b> 230/5.7/900
<b>Finish: Black Colorbond® with stainless Steel counter top and internal floor*</b>			
Refrigerator +1°/+4° kg-unpacked / Amps-run / Wv-refrigeration Watts (nom.)	<b>HCS2UGDCB</b> 180/4.1/650	<b>HCS3UGDCB</b> 200/4.6/750	<b>HCS4UGDCB</b> 230/5.7/900

Solid door (SD) models same price as above


\*Refer notes page 35

Gas: Self-contained fridge R134a@-5C SST  
Electrical lead length 1.5m min. 240V 50Hz  
Heat rejection self-contained units: Fridge 1.4xWr

Options (see page 35):

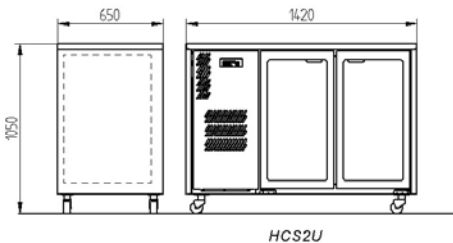

HCS2U

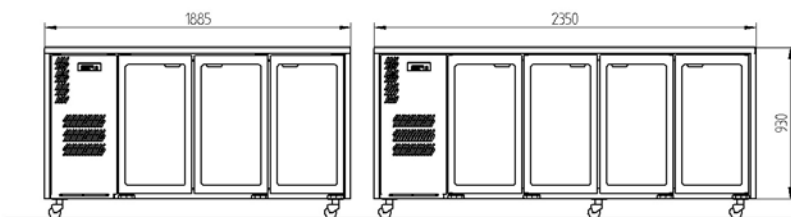

HCS3U

HCS4U

**Emerald – 2/1 Gastronorm Under Counter Self Contained**

Emerald

**Features:**


- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- Coved internal liner
- Forced air refrigeration system contained in a removable cassette for easy servicing and maintenance
- Auto defrost
- Waste heat recovery vaporiser
- 100% CFC free polyurethane foam for greater insulation properties and added strength
- Accommodates 2/1 gastronorm pans on shelves or dedicated anti tilt tray slides
- Two adjustable plastic coated 2/1 Gn shelves and two pairs of shelf slides per door
- Easy to remove shelf support, drawers and complete runner system to make cleaning and maintenance simple
- Heavy duty swivel and brake castors
- Self closing doors with easy to clean handles
- Hermetique compressor
- Face-mounted hinges (plinth mount ready)
- Anti corrosive evaporator coil coating



MODEL	E1U	E2U	E3U
Capacity	310 litres	610 litres	900 litres
<b>Finish: Stainless Steel interior and exterior*</b>			
H – Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>HE1U</b> 120/3.8/350	<b>HE2U</b> 160/4.0/500	<b>HE3U</b> 210/4.8/650
BA – Blown Air Well Refrigerator +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.) Pans 100mm deep (included) Gn	<b>HE1UBA</b> 120/3.8/600 5X 1/3	<b>HE2UBA</b> 160/4.0/750 9 X 1/3	<b>HE3UBA</b> 210/4.8/980 12 X 1/3
L – Freezer Solid Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>LE1U</b> 120/3.6/430	<b>LE2U</b> 160/4.8/610	N/A

\*Refer notes page 21

Gas: Self-contained fridge R134a@-5C SST  
 Self-contained freezer R404a@-30C SST  
 Electrical lead length 1.5m min. 240V 50Hz  
 Heat rejection self-contained units: Fridge 1.4xWr, Freezer 1.6xWr

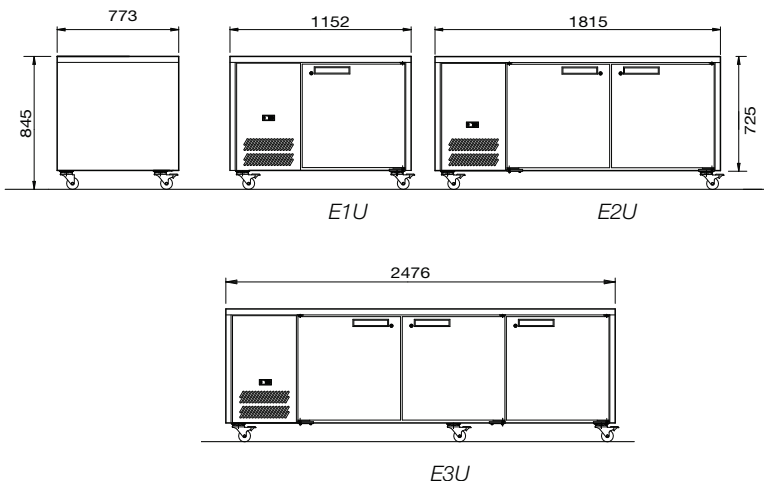

Options (see page 21):

- Drawers
- Stainless steel shelf
- Side venting
- Light to solid doors
- Right Hand services
- Cylindrical locks
- Locking tabs
- Glass door

BA – Blown Air Well

**Opal 1/1 Gastronorm Under Counter Self Contained**

Opal

**Features:**

- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- Coved internal liner
- 100% CFC free polyurethane foam for greater insulation properties and added strength
- Forced air refrigeration system contained in a FRONT BREATHING (FB model only) removable cassette for easy servicing and maintenance
- Auto defrost
- Waste heat recovery vaporiser
- Two adjustable plastic coated 1/1 Gn shelves and two pairs of dedicated anti tilt slides per door
- Easy to remove shelf support, drawers and complete runner system to make cleaning and maintenance simple
- Heavy duty swivel and brake castors
- Self closing doors with easy to clean handles
- Hermetique compressor
- Face-mounted hinges (plinth mount ready)
- Anti corrosive evaporator coil coating




MODEL	O1U	O2U	O3U	O4U
Capacity	190 litres	350 litres	510 litres	670 litres
<b>Finish: Stainless Steel interior and exterior*</b>				
H – Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>HO1UFB</b> 100/2.8/280	<b>HO2UFB</b> 130/3.8/400	<b>HO3UFB</b> 160/4.0/500	<b>HO4UFB</b> 190/4.8/650
BA – Blown Air Well Refrigerator +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.) Pans 100mm deep (included) Gn	<b>HO1UBA</b> 100/2.8/430 4 X 1/3	<b>HO2UBA</b> 130/3.8/600 7 X 1/3	<b>HO3UBA</b> 160/4.0/750 9 X 1/3	<b>HO4UBA</b> 190/4.8/850 12 X 1/3
L – Freezer Solid Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	<b>LO1UFB</b> 100/3.0/320	<b>LO2UFB</b> 130/4.5/450	<b>LO3UFB</b> 160/4.7/600	N/A

\*Refer notes page 21

Gas: Self-contained fridge R134a@-5C SST  
Self-contained freezer R404a@-30C SST  
Electrical lead length 1.5m min. 240V 50Hz  
Heat rejection self-contained units: Fridge 1.4xWr, Freezer 1.6xWr

Options (see page 21):

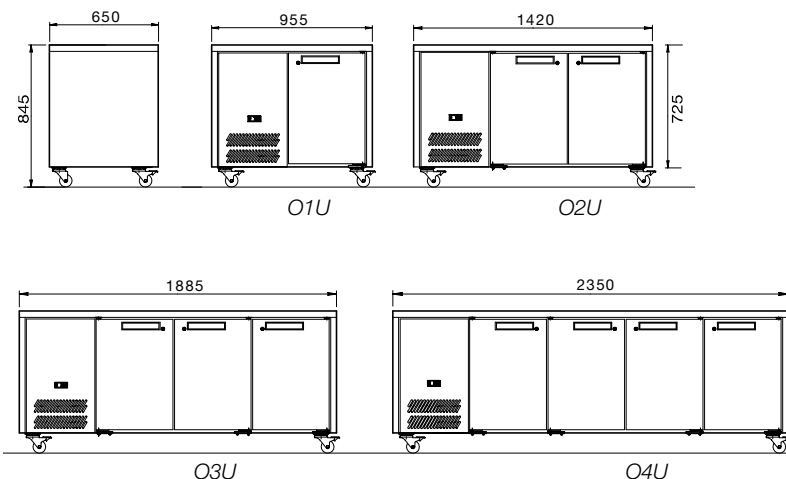

BA – Blown Air Well